


## TA 1 CONDUCTOR AL/CU

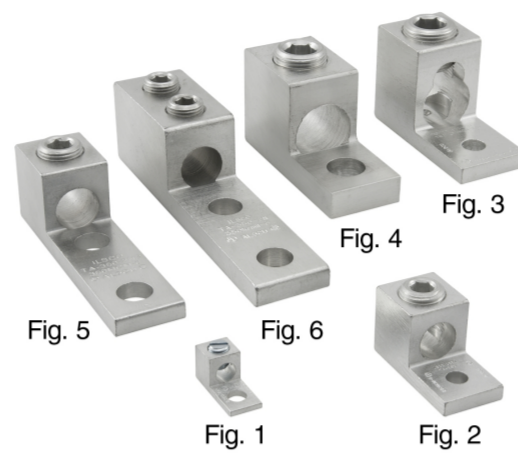

- Manufactured from high strength 6061-T6 aluminum alloy.
- Electro-Tin plated.
- Suitable for use in circuits rated at 35 KV or less; proper high voltage spacing and insulation techniques must be used.
- Suitable for use with either copper or aluminum conductors.
- Chamfered wire entry provides ease of installation.
- CSA Certified.
- Rated to 90° C.
- UL 486A/B Listed, UL File E6207.
- TA-6-S through TA-500 Listed to UL467, UL File E6207

Figure Number	Conductor Range	Bolt/Stud Size	Mounting Hole Spacing	Length	Width	Height	Hex Size	Standard Package	Item ID	NAED/UPC Number
2	250 kcmil-6 AWG	5/16		1.9840	0.9900	1.1220	5/16	25	TA-250	0783669889420
5	350 kcmil-6 AWG	1/2	1-3/4	4.3125	1.1250	1.3750	3/8	6	TA-350-2NS	0783669892222
2	600 kcmil-2 AWG	3/8		3.1875	1.5000	1.5630	1/2	12	TA-600	0783669892161
5	600 kcmil-2 AWG	1/2	1-3/4	4.6875	1.5000	1.5630	1/2	3	TA-600-2NS	0783669892178