

CABLE ASSEMBLIES

POWER DISTRIBUTION

CONTROLS

WWW.POWERASSEMBLIES.COM

• LAS VEGAS, NV • BEND, OR • POMPANO BEACH, FL•

### **BANDED TIE-IN SETS**

PRODUCT SPECIFICATIONS

#### **OVERVIEW**

ABRASION RESISTANT


> FLEXIBLE CABLE

OUTDOOR RATED

HEAT RESISTANT

Power Assemblies' Banded Tie-In Sets consist of equal-length 2AWG stage cables banded together with a heavy-duty adhesive band. The camlock connectors are series 16, which are compatible with all major manufacturers and are color coded to match the voltage. Lengths come standard as 3' and 5', however custom lengths are available.

Note: Lengths less than 5' will not be banded

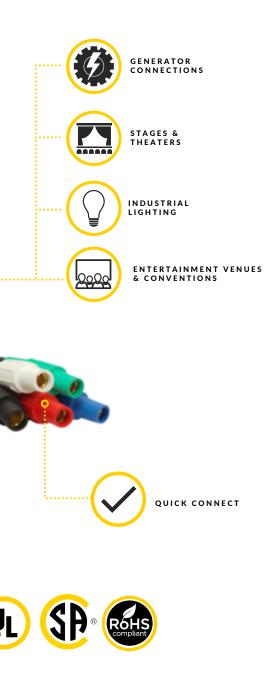













# CABLE SPECIFICATIONS

TYPE SC

#### **TECHNICAL DATA**


Temperature Rating: 105 °C

Voltage: 600V AWG: #8 - 4/0 Conductors: 1

### **APPLICATIONS**

Portable Power Systems Entertainment Industry Communication & Audio Temporary Power



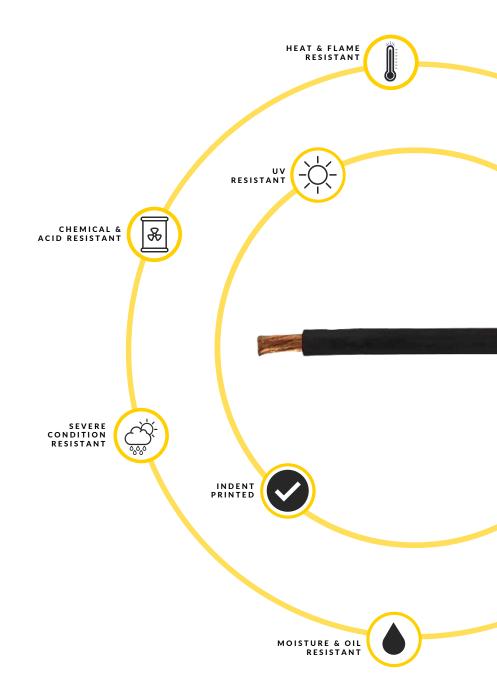











## **CONNECTOR SPECIFICATIONS**

**SERIES 16 CAMLOCK** 













