



INNOVATIVE POWER SOLUTIONS

CABLE ASSEMBLIES

POWER DISTRIBUTION

CONTROLS

WWW.POWERASSEMBLIES.COM

• LAS VEGAS, NV • BEND, OR • POMPANO BEACH, FL •


BANDED TIE-IN SETS

PRODUCT SPECIFICATIONS

OVERVIEW

Power Assemblies' Banded Tie-In Sets consist of equal-length 2AWG stage cables banded together with a heavy-duty adhesive band. The camlock connectors are series 16, which are compatible with all major manufacturers and are color coded to match the voltage. Lengths come standard as 3' and 5', however custom lengths are available.

Note: Lengths less than 5' will not be banded

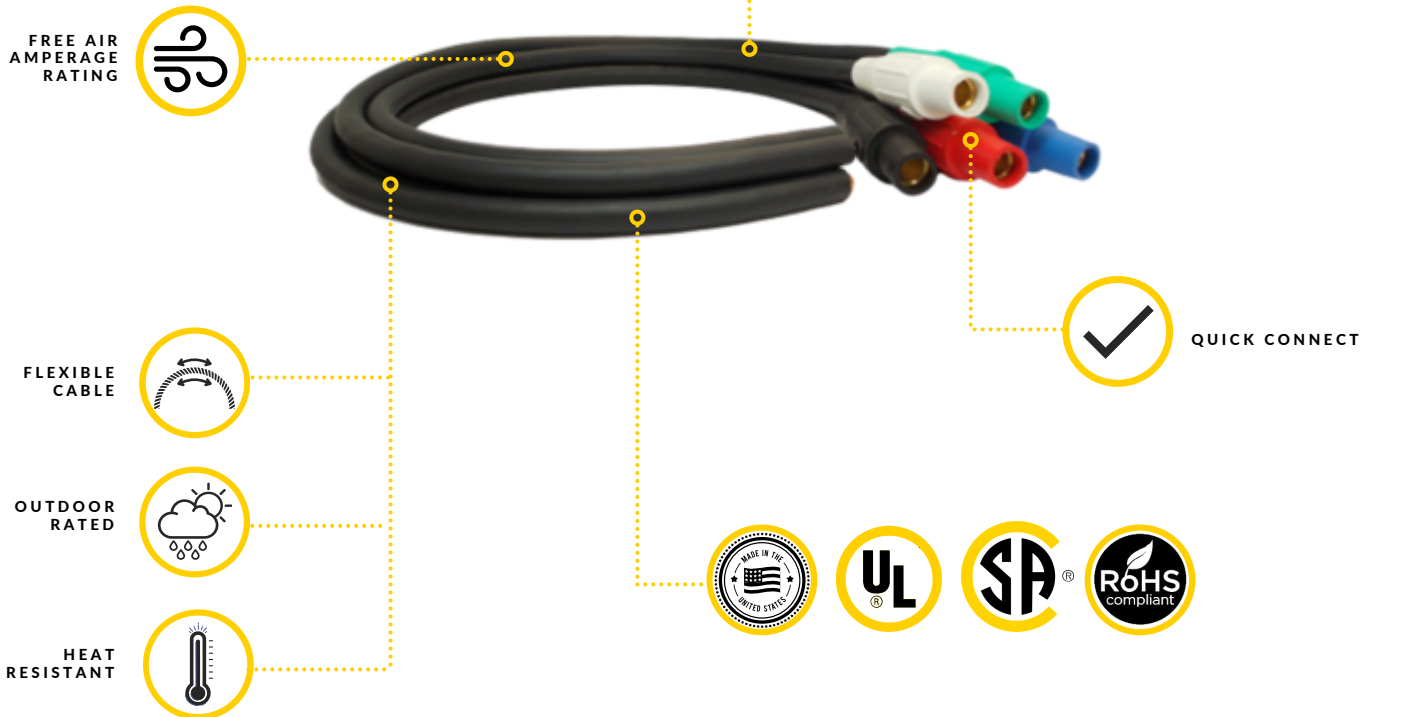

CABLE SPECIFICATIONS

TYPE SC

TECHNICAL DATA

Temperature Rating: 105 °C

Voltage: 600V

AWG: #8 - 4/0

Conductors: 1

APPLICATIONS

Portable Power Systems

Entertainment Industry

Communication & Audio

Temporary Power



CHEMICAL & ACID RESISTANT



SEVERE CONDITION RESISTANT



UV RESISTANT



DIRECT BURY & TRAY CABLE RATED



HEAT & FLAME RESISTANT



INDENT PRINTED



MOISTURE & OIL RESISTANT



FLORIDA
(866)825-8525
SALES@POWERASSEMBLIES.COM
POWERASSEMBLIES.COM



LAS VEGAS
(877)597-5787
SALES@POWERASSEMBLIES.COM
POWERASSEMBLIES.COM



COMPONENT SPECIFICATIONS

SERIES 16 CAMLOCK





TECHNICAL DATA

Series: 16
AWG: 2/0 - 4/0
Amperage Rating: 400A
Voltage Rating: 600V
Max Temperature Rating: 105°C
Double Set Screw

MATERIAL

Insulating Sleeve: Plastic
Contacts: Gold Plated
Locking Rings: Rubber Coated

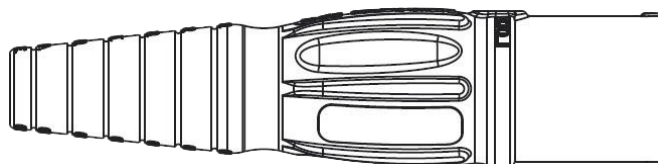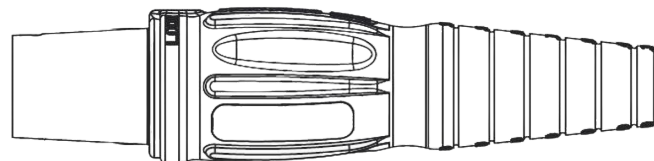

FLORIDA
(866)825-8525
SALES@POWERASSEMBLIES.COM
POWERASSEMBLIES.COM



LAS VEGAS
(877)597-5787
SALES@POWERASSEMBLIES.COM
POWERASSEMBLIES.COM

