



INNOVATIVE POWER SOLUTIONS

CABLE ASSEMBLIES

POWER DISTRIBUTION

CONTROLS

WWW.POWERASSEMBLIES.COM

• LAS VEGAS, NV • BEND, OR • POMPANO BEACH, FL •

TYPE DLO PIGTAILS

PRODUCT SPECIFICATIONS

OVERVIEW

Power Assemblies pigtails made from DLO cable are for use with DLO, stage cable or Type W assemblies. Available with Lug, Blunt or tinned cdr ends. Lengths are standard in 3', 5', and 6' for pigtails. Custom lengths are also available.



GENERATOR CONNECTIONS



INDUSTRIAL FACILITIES



CONSTRUCTION SITES



ENTERTAINMENT VENUES



TEMPORARY POWER

ABRASION RESISTANT




QUICK CONNECT



MOISTURE RESISTANT



OUTDOOR RATED



HEAT RESISTANT



FLORIDA
(866)825-8525
SALES@POWERASSEMBLIES.COM
POWERASSEMBLIES.COM



LAS VEGAS
(877)597-5787
SALES@POWERASSEMBLIES.COM
POWERASSEMBLIES.COM



CABLE SPECIFICATIONS

TYPE DLO

TECHNICAL DATA

Temperature Rating: 90 °C

Voltage: 2000V

AWG: #8-250

Conductors: 1


APPLICATIONS

Portable Power Systems

Entertainment Industry

Communication & Audio

Temporary Power

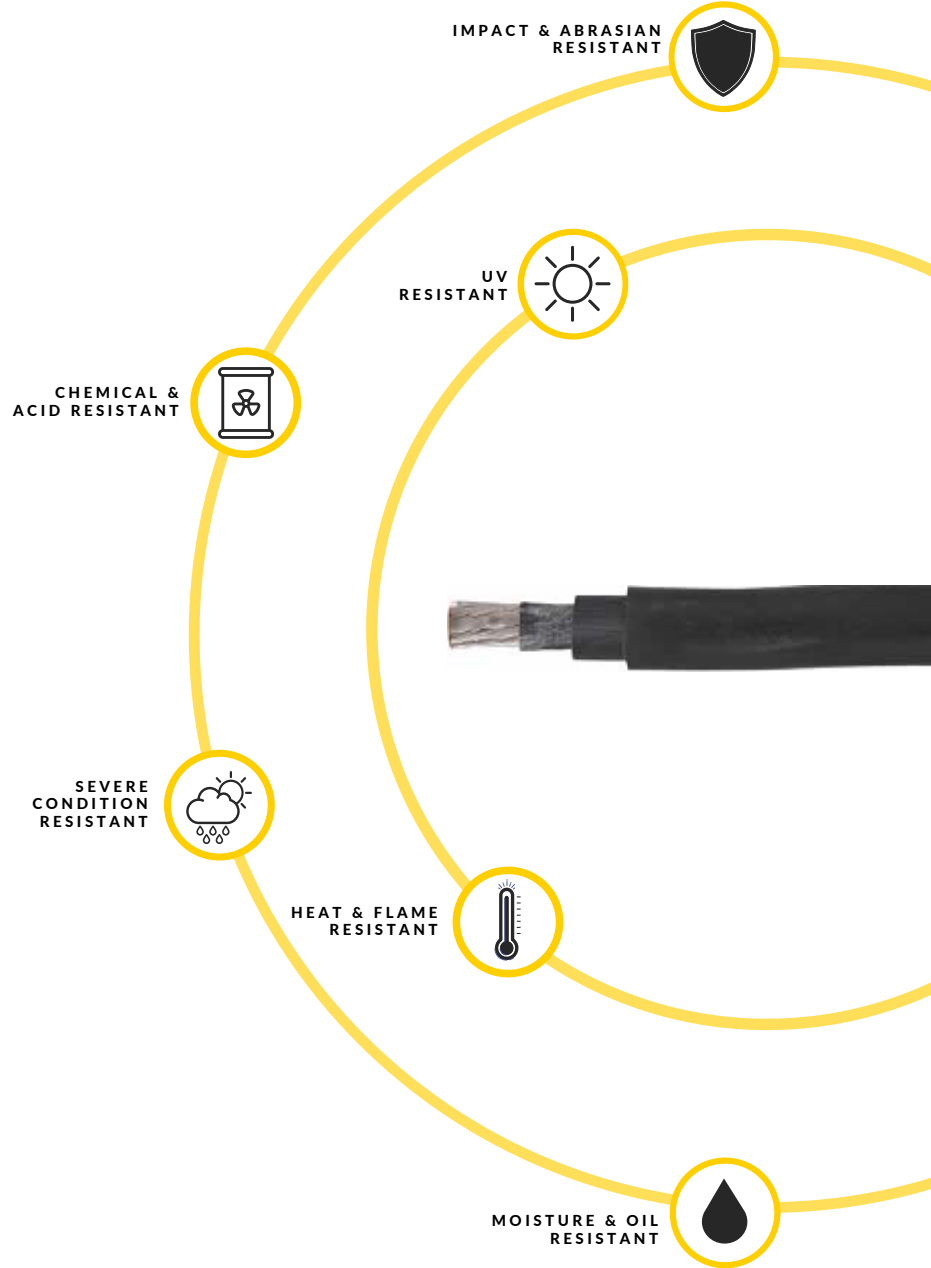

FLORIDA
(866)825-8525
SALES@POWERASSEMBLIES.COM
POWERASSEMBLIES.COM



LAS VEGAS
(877)597-5787
SALES@POWERASSEMBLIES.COM
POWERASSEMBLIES.COM



CONNECTOR SPECIFICATIONS

SERIES 16 CAMLOCK




TECHNICAL DATA

Series: 16
AWG: 2/0 - 4/0
Amperage Rating: 400A
Voltage Rating: 600V
Temperature Rating: 105°C
Double Set Screw

MATERIAL

Insulating Sleeve: Plastic
Contacts: Gold Plated
Locking Rings: Rubber Coated

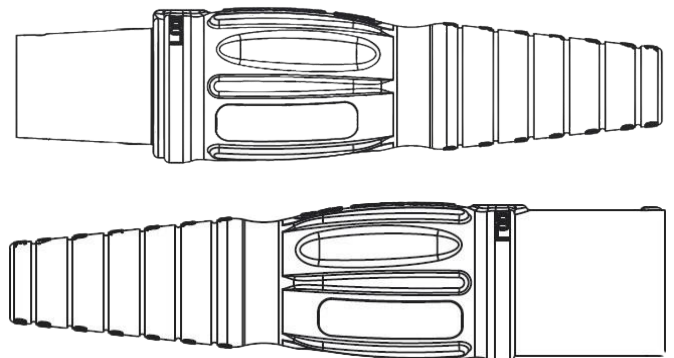

CONNECTOR SPECIFICATIONS

SERIES 15 CAMLOCK



CONTROLLED
REMOVAL



UV
RESISTANT



ERGONOMIC
GRIP



ALIGNMENT
INDICATORS



OVER-TORQUE
RESISTANT



QUICK-CONNECT
DESIGN



TECHNICAL DATA

Series: 15
AWG: #8-#2
Amperage Rating: 150A
Voltage Rating: 600V
Temperature Rating: 105°C
Double Set Screw

MATERIAL

Insulating Sleeve: Plastic
Contacts: Gold Plated
Locking Rings: Rubber Coated



FLORIDA
(866)825-8525
SALES@POWERASSEMBLIES.COM
POWERASSEMBLIES.COM



LAS VEGAS
(877)597-5787
SALES@POWERASSEMBLIES.COM
POWERASSEMBLIES.COM

